


# DIN 914

ISO 4027  
ГОСТ 8878-93

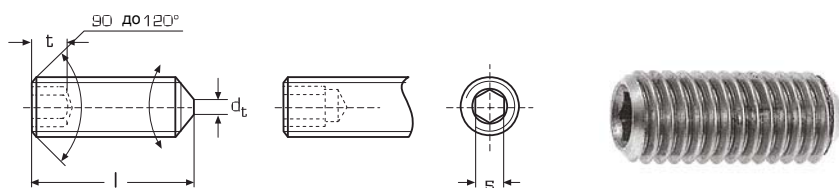

## Винт стопорный с конусом

Нержавеющая сталь A2 (AISI 304)/A4 (AISI 316)

dt	-	-	-	-	-	1,5	2,0	2,5	3,0	4,0	5,0
t	0,8	1,2	1,2	1,5	2,0	2,0	3,0	4,0	4,8	6,4	8,0
e	1,003	1,427	1,73	2,3	2,87	3,44	4,58	5,72	6,86	9,15	11,43
s	0,9	1,3	1,5	2,0	2,5	3,0	4,0	5,0	6,0	8,0	10,0

d1	M 2	M 2,5	M 3	M 4	M 5	M 6	M 8	M 10	M 12	M 16	M 20
l 3	0,004	0,009	0,009	0,010							
4	0,006	0,010	0,013	0,016							
5	0,007	0,012	0,017	0,026	0,037	0,065					
6	0,009	0,015	0,021	0,034	0,049	0,070	0,172				
8	0,012	0,020	0,030	0,049	0,073	0,104	0,200				
10	0,015	0,025	0,039	0,064	0,097	0,139	0,235	0,342			
12	0,018	0,015	0,048	0,079	0,121	0,174	0,298	0,442	0,586		
14					0,145	0,209	0,424	0,642			
16			0,066	0,109	0,169	0,244	0,424	0,840	0,890		
20			0,084	0,139	0,217	0,314	0,550	1,080	1,170	2,010	3,040
25			0,107	0,159	0,277	0,402	0,709	1,330	1,530	2,660	4,070
30				0,193	0,337	0,490	0,868	1,580	1,890	3,320	5,100
35				0,231	0,430	0,578	1,030	1,830	2,250	3,970	6,130
40				0,275		0,666	1,190	2,080	2,610	4,630	4,630
45					0,500	0,754	1,300	2,320	2,793	5,280	8,190
50					0,577	0,842	1,420		3,200	5,930	9,220
55									3,500		
60						1,018	1,700		3,800	7,230	
70									4,770	9,460	
80									5,490		
90											
100											
	500	500	500	200	200	200	100	100	50	25	25

Вес 100 шт./кг