


DIN 915

ISO 4028
ГОСТ 11075-93

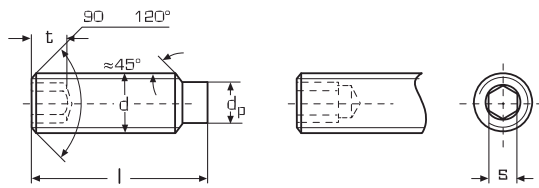

Винт стопорный с цапфой
Нержавеющая сталь А2 (АISI 304)/А4 (АISI 316)

dp	1,0	1,5	2,0	2,5	3,5	4,0	5,5	7,0	8,5	12,0
t	0,8	1,2	1,2	1,5	2,0	2,0	3,0	4,0	4,8	6,4
e	1,003	1,427	1,73	2,3	2,87	3,44	4,58	5,72	6,86	9,15
s	0,9	1,3	1,5	2,0	2,5	3,0	4,0	5,0	6,0	8,0

d1	M 2	M 2,5	M 3	M 4	M 5	M 6	M 8	M 10	M 12	M 16
l 2										
3		0,012	0,012							
4	0,006		0,013	0,012						
5		0,012	0,016	0,020	0,040					
6		0,015	0,019	0,029	0,050	0,075				
8		0,020	0,028	0,044	0,071	0,102	0,188			
10		0,025	0,037	0,059	0,095	0,129	0,228	0,241		
12		0,032	0,046	0,074	0,119	0,163	0,268	0,441	0,891	
14						0,199	0,394			
16			0,064	0,104	0,167	0,234	0,394	0,605	0,891	
20			0,082	0,134	0,215	0,304	0,520	0,802	1,100	2,010
25			0,101	0,166	0,275	0,392	0,679	1,050	1,460	2,510
30			0,124	0,212	0,330	0,480	0,838	1,300	1,820	3,190
35						0,568	0,997	1,550	2,180	3,820
40						0,656	1,160	1,800	2,540	4,490
45						0,740	1,323	2,050	2,800	5,160
50						0,808	1,486	2,223	3,100	5,830
55								2,550	3,400	
60						1,013	1,812	2,653	3,800	7,170
70									4,700	8,500
	500	500	500	200	200	200	100	100	50	25

Вес 100 шт./кг