


# DIN 916

ISO 4029  
ГОСТ 28964-91

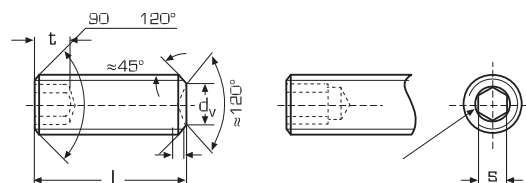

## Винт стопорный с внутренним конусом

Нержавеющая сталь A2 (AISI 304)/A4 (AISI 316)

<b>dt</b>	-	-	-	-	-	1,5	2,0	2,5	3,0	4,0	5,0
<b>t</b>	0,8	1,2	1,2	1,5	2,0	2,0	3,0	4,0	4,8	6,4	8,0
<b>e</b>	1,003	1,427	1,73	2,3	2,87	3,44	4,58	5,72	6,86	9,15	11,43
<b>s</b>	0,9	1,3	1,5	2,0	2,5	3,0	4,0	5,0	6,0	8,0	10,0

d1	M 2	M 2,5	M 3	M 4	M 5	M 6	M 8	M 10	M 12	M 16	M 20
<b>l 2</b>											
<b>3</b>	0,004	0,008	0,008								
<b>4</b>	0,006		0,014	0,018	0,034						
<b>5</b>	0,007	0,012	0,018	0,026	0,042	0,065					
<b>6</b>	0,009	0,020	0,022	0,038	0,054	0,074	0,125				
<b>8</b>	0,012		0,031	0,053	0,078	0,109	0,188				
<b>10</b>	0,015	0,025	0,040	0,068	0,102	0,144	0,251	0,300			
<b>12</b>			0,049	0,083	0,126	0,179	0,314	0,473	0,622		
<b>14</b>				0,097							
<b>16</b>			0,067	0,113	0,174	0,249	0,440	0,673	0,950	1,504	
<b>20</b>			0,085	0,143	0,122	0,319	0,566	0,871	1,230	2,090	
<b>25</b>				0,177	0,282	0,407	0,725	1,120	1,590	2,740	
<b>30</b>				0,200	0,442	0,495	0,884	1,370	1,950	3,400	
<b>35</b>					0,442	0,583	1,040	1,620	2,310	4,050	
<b>40</b>					0,464	0,671	1,200	1,870	2,670	4,710	7,230
<b>45</b>						0,759	1,360	2,120	3,030	5,400	
<b>50</b>						0,847	1,494	2,315	3,390	6,000	
<b>55</b>						0,935			3,750	6,085	
<b>60</b>						1,006	1,768	2,870	4,110	7,400	
<b>70</b>							2,148		3,750		
	500	500	500	200	200	200	100	100	50	25	25

Вес 100 шт./кг