STANDARD

ISO : 965 Part 2
EN : –
DIN : 13 Part 13/20

SCREW THREADS

Metric (ISO) screw thread, coarse series -M-

Basic profile and limiting profiles

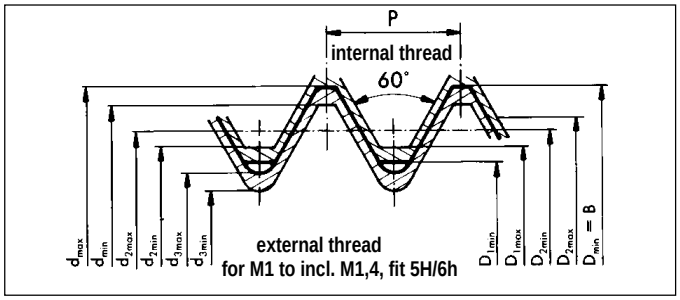

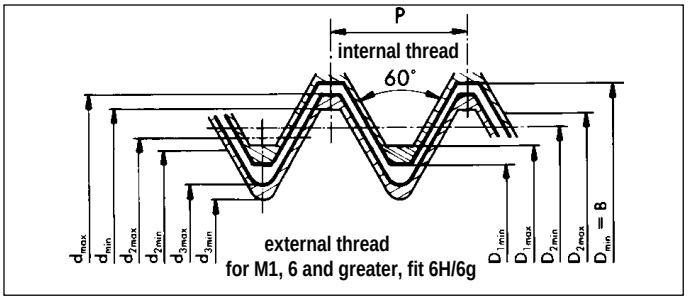

The bold lines indicate the maximum material profiles.
The maximum material profile of the internal thread is the basic profile.

B = basic major diameter
P = pitch

d = major diameter
d_3 = minor diameter
d_2 = pitch diameter
external thread

D = major diameter
D_1 = minor diameter
D_2 = pitch diameter
internal thread

Limits of sizes for metric screw thread, coarse series, fit 6H/6g[1])

Dimensions in mm

Basic [2] diameter	Pitch	External thread tol. 6g [1] (bolts and screws)						Internal thread tol. 6H [1] (nuts)				Section at minor dia.	Stress area
		major diameter		pitch diameter		minor diameter		pitch diameter		minor diameter			
$B = D_{min}$	P	d_{max}	d_{min}	d_{2max}	d_{2min}	d_{3max}	d_{3min}	D_{2min}	D_{2max}	D_{1min}	D_{1max}	$\pi/4\ d_3^{\ 2}$ A_{d3} mm²	$\pi/4\ \frac{(d2+d3)2}{2}$ A_s mm²
1 [1])	0,25	1,000	0,933	0,838	0,785	0,693	0,630	0,838	0,894	0,729	0,785	0,377	0,460
1,1[1])	0,25	1,100	1,033	0,938	0,885	0,793	0,730	0,938	0,994	0,829	0,885	0,494	0,588
1,2[1])	0,25	1,200	1,133	1,038	0,985	0,893	0,830	1,038	1,094	0,929	0,985	0,626	0,732
1,4[1])	0,3	1,400	1,325	1,205	1,149	1,032	0,964	1,205	1,265	1,075	1,142	0,837	0,983
1,6	0,35	1,581	1,496	1,354	1,291	1,152	1,075	1,373	1,458	1,221	1,321	1,075	1,27
1,8	0,35	1,781	1,696	1,554	1,491	1,352	1,275	1,573	1,658	1,421	1,521	1,474	1,70
2	0,4	1,981	1,886	1,721	1,654	1,490	1,407	1,740	1,830	1,567	1,679	1,788	2,07
2,2	0,45	2,180	2,080	1,888	1,817	1,628	1,540	1,908	2,003	1,713	1,838	2,133	2,48
2,5	0,45	2,480	2,380	2,188	2,117	1,928	1,840	2,208	2,303	2,013	2,138	2,980	3,39
3	0,5	2,980	2,874	2,655	2,580	2,367	2,273	2,675	2,775	2,459	2,599	4,475	5,03
3,5	0,6	3,479	3,354	3,089	3,004	2,743	2,635	3,110	3,222	2,850	3,010	6,000	6,78
4	0,7	3,978	3,838	3,523	3,433	3,119	3,002	3,545	3,663	3,242	3,422	7,749	8,78
4,5	0,75	4,478	4,338	3,991	3,901	3,558	3,439	4,013	4,131	3,688	3,878	10,07	11,3
5	0,8	4,976	4,826	4,456	4,361	3,995	3,869	4,480	4,605	4,134	4,334	12,69	14,2
6	1	5,974	5,794	5,324	5,212	4,747	4,596	5,350	5,500	4,917	5,153	17,89	20,1
7	1	6,974	6,794	6,324	6,212	5,747	5,596	6,350	6,500	5,917	6,153	26,18	28,9
8	1,25	7,972	7,760	7,160	7,042	6,438	6,272	7,188	7,348	6,647	6,912	32,84	36,6
9	1,25	8,972	8,760	8,160	8,042	7,438	7,272	8,188	8,348	7,647	7,912	43,78	48,1
10	1,5	9,968	9,732	8,994	8,862	8,128	7,938	9,026	9,206	8,376	8,676	52,30	58,0
11	1,5	10,968	10,732	9,994	9,862	9,128	8,938	10,026	10,206	9,376	9,676	65,90	72,3
12	1,75	11,966	11,701	10,829	10,679	9,819	9,602	10,863	11,063	10,106	10,441	76,25	84,3
14	2	13,962	13,682	12,663	12,503	11,508	11,271	12,701	12,913	11,835	12,210	104,7	115
16	2	15,962	15,682	14,663	14,503	13,508	13,271	14,701	14,913	13,835	14,210	144,1	157
18	2,5	17,958	17,623	16,334	16,164	14,891	14,625	16,376	16,600	15,294	15,744	175,1	193
20	2,5	19,958	19,623	18,334	18,164	16,891	16,625	18,376	18,600	17,294	17,744	225,2	245
22	2,5	21,958	21,623	20,334	20,164	18,891	18,625	20,376	20,600	19,294	19,744	281,5	303
24	3	23,952	23,577	22,003	21,803	20,271	19,955	22,051	22,316	20,752	21,252	324,3	353
27	3	26,952	26,577	25,003	24,803	23,271	22,955	25,051	25,316	23,752	24,252	427,1	459
30	3,5	29,947	29,522	27,674	27,462	25,653	25,306	27,727	28,007	26,211	26,771	519,0	561
33	3,5	32,947	32,522	30,674	30,462	28,653	28,306	30,727	31,007	29,211	29,771	647,2	694
36	4	35,940	35,465	33,342	33,118	31,033	30,655	33,402	33,702	31,670	32,270	759,3	817
39	4	38,940	38,465	36,342	36,118	34,033	33,655	36,402	36,702	34,670	35,270	913,0	976
42	4,5	41,937	41,437	39,014	38,778	36,416	36,007	39,077	39,392	37,129	37,799	1045	1121
45	4,5	44,937	44,437	42,014	41,778	39,416	39,007	42,077	42,392	40,129	40,799	1224	1306
48	5	47,929	47,399	44,681	44,431	41,795	41,352	44,752	45,087	42,587	43,297	1377	1473
52	5	51,929	51,399	48,681	48,431	45,795	45,352	48,752	49,087	46,587	47,297	1652	1758
56	5,5	55,925	55,365	52,353	52,088	49,177	48,700	52,428	52,783	50,046	50,796	1905	2030
60	5,5	59,925	59,365	56,353	56,088	53,177	52,700	56,428	56,783	54,046	54,796	2227	2362
64	6	63,920	63,320	60,023	59,743	56,559	56,048	60,103	60,478	57,505	58,305	2520	2676
68	6	67,920	67,320	64,023	63,743	60,559	60,048	64,103	64,478	61,505	62,305	2888	3055

– For basic diameters above 68 mm see: metric screw thread, fine series.
– For coated threads the maximum values of d, d_2 and d_3 are equal to the values of the basic profile ($d_{2max} = D_{2min}$ and $d_{3max} = D_1$ min.)
- 1) the values for sizes 1 to incl. 1,4 mm correspond to the fit 5H/6h.
- 2) metric screw thread is designated by the basic diameter, preceded by the profile letter M and followed by the tolerance grade, e.g. 6, and the tolerance position, e.g. g.
Example: M10-6g. If no toleranceclass is indicated the above mentioned fits are valid.

FABORY

STANDARD

ISO : 965 Part 2
EN : –
DIN : 13 Part 13/21/22/23

SCREW THREADS

Metric (ISO) screw thread, fine series - MF-

info

Basic profile and limiting profiles

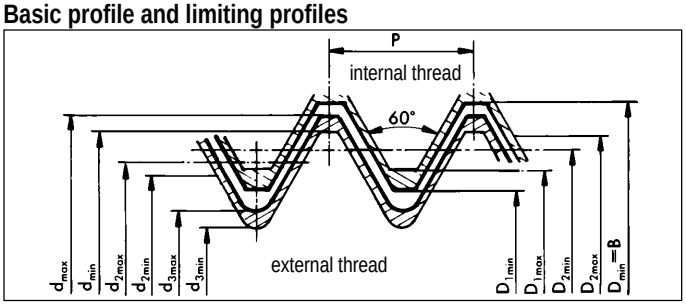

The bold lines indicate the maximum material profiles.
The maximum material profile of the internal thread is the basic profile.

B = basic major diameter
P = pitch

d = major diameter
d_2 = pitch diameter
d_3 = minor diameter
} external thread

D = major diameter
D_2 = pitch diameter
D_1 = minor diameter
} internal thread

Limits of sizes for metric screw thread, fine series, fit 6H/6g

Dimensions in mm

Basic[2] diameter	Pitch	External thread tol. 6g (bolts and screws)						Internal thread tol. 6H (nuts)				Section at minor dia	Stress area
		major diameter		pitch diameter		minor diameter		pitch diameter		minor diameter		$\pi/4\ d_3^{\ 2}$	$\pi/4\ \frac{(d2+d3)2}{2}$
$D_{min}=B$	P	d_{max}	d_{min}	d_{2max}	d_{2min}	d_{3max}	d_{3min}	D_{2min}	D_{2max}	D_{1min}	D_{1max}	A_{d3} mm²	A_s mm²
6	0,75	5,978	5,838	5,491	5,391	5,058	4,929	5,513	5,645	5,188	5,378	20,27	22,0
8	1	7,974	7,794	7,324	7,212	6,747	6,596	7,350	7,500	6,917	7,153	36,03	39,2
10	1	9,974	9,794	9,324	9,212	8,747	8,596	9,350	9,500	8,917	9,153	60,45	64,5
10	1,25	9,972	9,760	9,160	9,042	8,438	8,272	9,188	9,348	8,647	8,912	56,29	61,2
12	1	11,974	11,794	11,324	11,206	10,747	10,590	11,350	11,510	10,917	11,153	91,15	96,1
12	1,25	11,972	11,760	11,160	11,028	10,438	10,258	11,188	11,368	10,647	10,912	86,03	92,1
12	1,5	11,968	11,732	10,994	10,854	10,128	9,930	11,026	11,216	10,376	10,676	81,07	88,1
14	1,5	13,968	13,732	12,994	12,854	12,128	11,930	13,026	13,216	12,376	12,676	116,1	125
16	1,5	15,968	15,732	14,994	14,854	14,128	13,930	15,026	15,216	14,376	14,676	157,5	167
18	1,5	17,968	17,732	16,994	16,854	16,128	15,930	17,026	17,216	16,376	16,676	205,1	216
18	2	17,962	17,682	16,663	16,503	15,508	15,271	16,701	16,913	15,835	16,210	189,8	204
20	1,5	19,968	19,732	18,994	18,854	18,128	17,930	19,026	19,216	18,376	18,676	259,0	272
20	2	19,962	19,682	18,663	18,503	17,508	17,271	18,701	18,913	17,835	18,210	241,8	258
22	1,5	21,968	21,732	20,994	20,854	20,128	19,930	21,026	21,216	20,376	20,676	319,2	333
22	2	21,962	21,682	20,663	20,503	19,508	19,271	20,701	20,913	19,835	20,210	300,1	318
24	1,5	23,968	23,732	22,994	22,844	22,128	21,920	23,026	23,226	22,376	22,676	385,7	401
24	2	23,962	23,682	22,663	22,493	21,508	21,261	22,701	22,925	21,835	22,210	364,6	384
27	1,5	26,968	26,732	25,994	25,844	25,128	24,920	26,026	26,226	25,376	25,676	497,2	514
27	2	26,962	26,682	25,663	25,493	24,508	24,261	25,701	25,925	24,835	25,210	473,2	496
30	1,5	29,968	29,732	28,994	28,844	28,128	27,920	29,026	29,226	28,376	28,676	622,8	642
30	2	29,962	29,682	28,663	28,493	27,508	27,261	28,701	28,925	27,835	28,210	596,0	621
33	1,5	32,968	32,732	31,994	31,844	31,128	30,920	32,026	32,226	31,376	31,676	762,6	784
33	2	32,962	32,682	31,633	31,493	30,508	30,261	31,701	31,925	30,835	31,210	732,8	761
36	1,5	35,968	35,732	34,994	34,844	34,128	33,920	35,026	35,226	34,376	34,676	916,5	940
36	3	35,952	35,577	34,003	33,803	32,271	31,955	34,051	34,316	32,752	33,252	820,4	865
39	1,5	38,968	38,732	37,994	37,844	37,128	36,920	38,026	38,226	37,376	37,676	1085	1110
39	3	38,952	38,577	37,003	36,803	35,271	34,955	37,051	37,316	35,752	36,252	979,7	1028
42	1,5	41,968	41,732	40,994	40,844	40,128	39,920	41,026	41,226	40,376	40,676	1267	1294
42	3	41,952	41,577	40,003	39,803	38,271	37,955	40,051	40,316	38,752	39,252	1153	1206
45	1,5	44,968	44,732	43,994	43,844	43,128	42,920	44,026	44,226	43,376	43,676	1463	1492
45	3	44,952	44,577	43,003	42,803	41,276	40,955	43,051	43,316	41,752	42,252	1341	1398
48	1,5	47,968	47,732	46,994	46,834	46,128	45,910	47,026	47,238	46,376	46,676	1674	1705
48	3	47,952	47,577	46,003	45,791	44,271	43,943	46,051	46,331	44,752	45,252	1543	1604
52	1,5	51,968	51,732	50,994	50,834	50,128	49,910	51,026	51,238	50,376	50,676	1976	2010
52	3	51,952	51,577	50,003	49,791	48,271	47,943	50,051	50,331	48,752	49,252	1834	1900
56	2	55,962	55,682	54,663	54,483	53,508	53,251	54,701	54,937	53,835	54,210	2252	2301
56	4	55,940	55,465	53,342	53,106	51,033	50,643	53,402	53,717	51,670	52,270	2050	2144
60	4	59,940	59,465	57,342	57,106	55,033	54,643	57,402	57,717	55,670	56,270	2384	2485
64	4	63,940	63,465	61,342	61,106	59,033	58,643	61,402	61,717	59,670	60,270	2743	2851
68	4	67,940	67,465	65,342	65,106	63,033	62,643	65,402	65,717	63,670	64,270	3127	3242
72	6	71,920	71,320	68,023	67,743	64,559	64,048	68,103	68,478	65,505	66,305	3287	3463
76	6	75,920	75,320	72,023	71,743	68,559	68,048	72,103	72,478	69,505	70,305	3700	3889
80	6	79,920	79,320	76,023	75,743	72,559	72,048	76,103	76,478	73,505	74,305	4144	4344
90	6	89,920	89,320	86,023	85,743	82,559	82,048	86,103	86,478	83,505	84,305	5364	5590
100	6	99,920	99,320	96,023	95,723	92,559	92,028	96,103	96,503	93,505	94,305	6740	7000
110	6	109,920	109,320	106,023	105,723	102,559	102,028	106,103	106,503	103,505	104,305	8273	8560

– For coated threads the maximum values of d, d_2 and d_3 are equal to the values of the basic profile ($d2_{max}=D_{2min}$ and $d_{3max}=D_{1min}$)
– Metric screw thread, fine series, are designated by the basic diameter, preceded by the profile letter M and followed by the pitch separated by an x-mark and then by the tolerance grade, e.g. 6, and the tolerance position, e.g. H. Example: M10 x 1,25 – 6H. If no tolerance is indicated the fit 6H/6g is valid.