



DIN 439A

ISO 4035
ГОСТ 5916-70

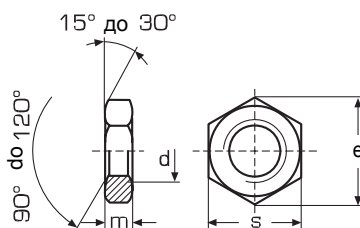

Гайка шестигранная низкая с мелким шагом резьбы

Нержавеющая сталь A2 (AISI 304)/A4 (AISI 316)

d	Вес 100 шт./кг	s	m	e min	
BM 8 x 0,75	0,320	13,0	4,0	14,38	200
BM 8 x 1	0,320	13,0	4,0	14,38	200
BM 10 x 1	0,720	17,0	5,0	18,90	200
BM 10 x 1,25	0,720	17,0	5,0	18,90	600
BM 12 x 1	1,040	19,0	6,0	21,10	200
BM 12 x 1,25	1,040	19,0	6,0	21,10	200
BM 12 x 1,5	1,040	19,0	6,0	21,10	200
BM 14 x 1,5	1,590	22,0	7,0	24,49	100
BM 16 x 1,25	2,050	24,0	8,0	26,75	100
BM 16 x 1,5	2,050	24,0	8,0	26,75	100
BM 18 x 1,5	2,960	27,0	9,0	30,14	100
BM 20 x 1,5	4,020	30,0	10,0	33,53	100
BM 20 x 2	4,020	30,0	10,0	33,53	100
BM 22 x 1,5	4,830	32,0	11,0	35,72	100
BM 22 x 2	4,830	32,0	11,0	35,72	100
BM 24 x 1,5	6,950	36,0	12,0	39,98	50
BM 24 x 2	6,950	36,0	12,0	39,98	50
BM 27 x 1,5	10,100	41,0	13,5	45,63	50
BM 27 x 2	10,100	41,0	13,5	45,63	50
BM 30 x 1,5	13,900	46,0	15,0	51,28	50
BM 30 x 2	13,900	46,0	15,0	51,28	25
BM 33 x 2	18,300	50,0	16,5	55,80	10